

XenDesktop


Pour ceux qui ont migré d'un XenDesktop 7.1 vers 7.9 voici comment activer le Client HTML 5

Il y a eu pas mal de changements depuis la version 7.1, mais un des changements qui m'a le plus ...


« troublé » c'est l'absence des icônes « **Authentification** » « **Receiver for Web** » et « **beacons** » dans l'interface d'administration de Storefront.

Dans la version 7.1 pour activer le client léger HTML5 il fallait :

Dans l'interface Storefront dans le menu de gauche cliquer « **Receiver for Web** »

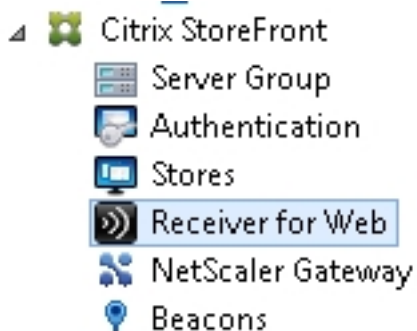


Dans le menu de droit cliquer « **Deploy Citrix Receiver** »

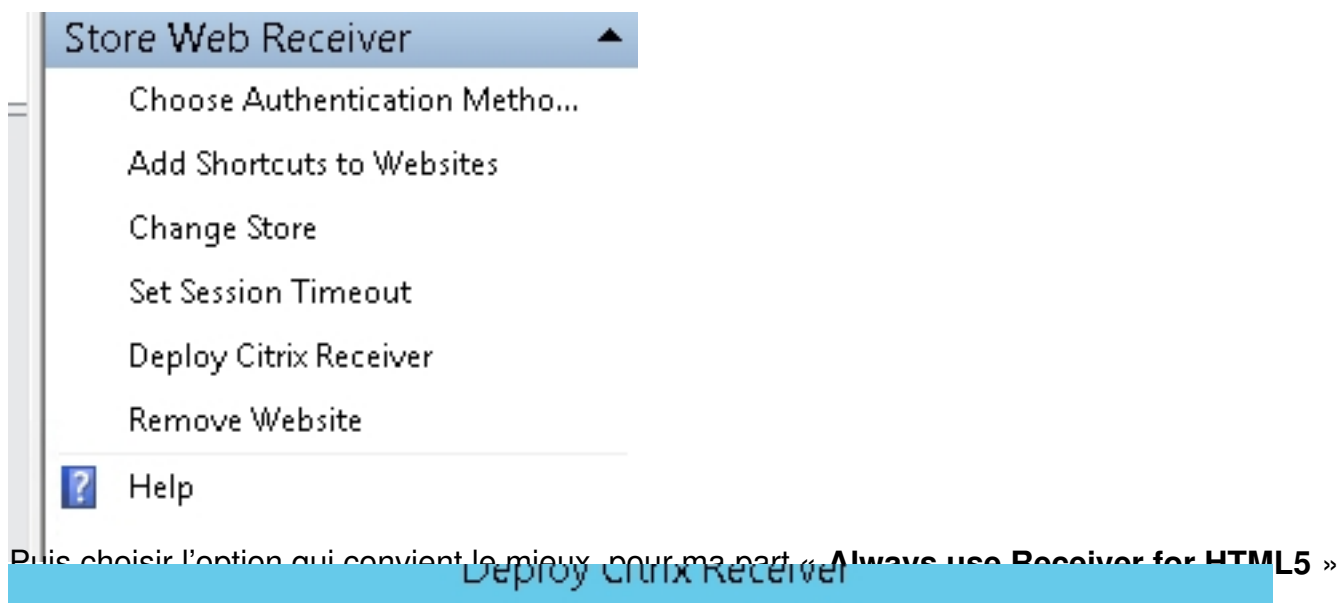

For the best user experience, Receiver for Web sites detect Windows and Mac OS X devices and offer users the opportunity to download and install Citrix Receiver. If users cannot install Citrix Receiver, enable Receiver for HTML5.

Choose how to deploy Citrix Receiver:

- Install locally
- Use Receiver for HTML5 if local install fails i
- Always use Receiver for HTML5

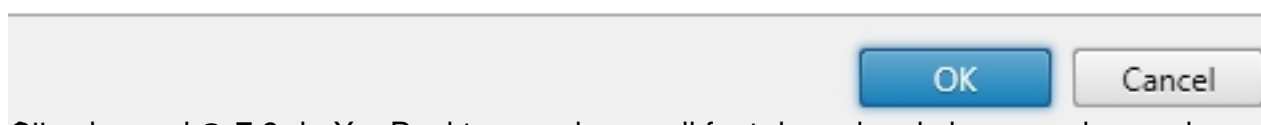


Quand on va sur le XenDesktop ça change, il faut donc depuis le menu de gauche :




Choisir le Store :

Written by Cyril Pineiro
Monday, 02 April 2018 16:45

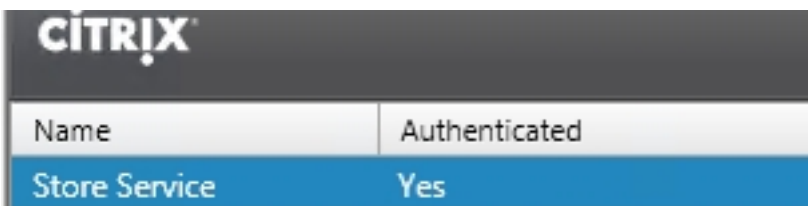

Name	Authenticated
Store Service	Yes


Dans le menu de droite cliquer « **Manage Receiver for Web Sites** »

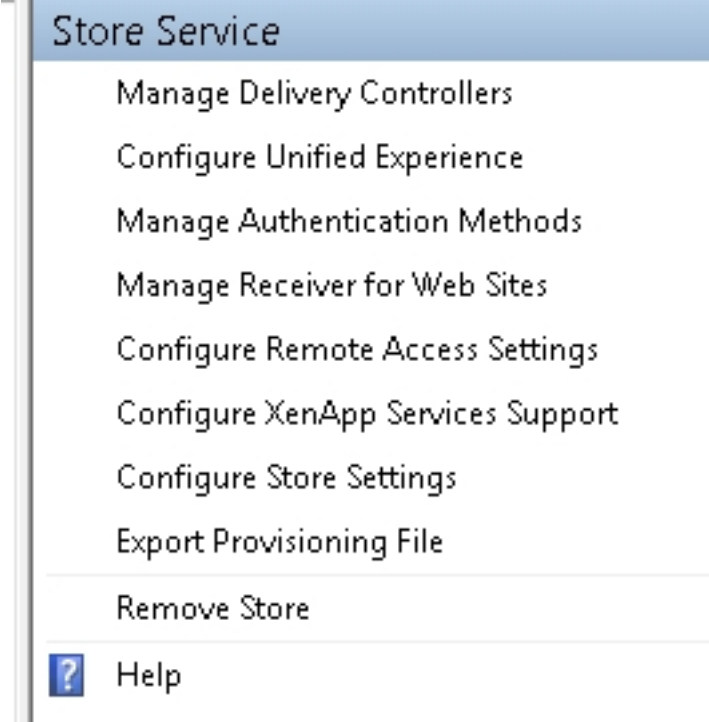

Sélectionner l'URL du Store à modifier, cliquer « **Configure** »

These sites allow users to access the store 'Store Service' through a webpage.

Web sites:

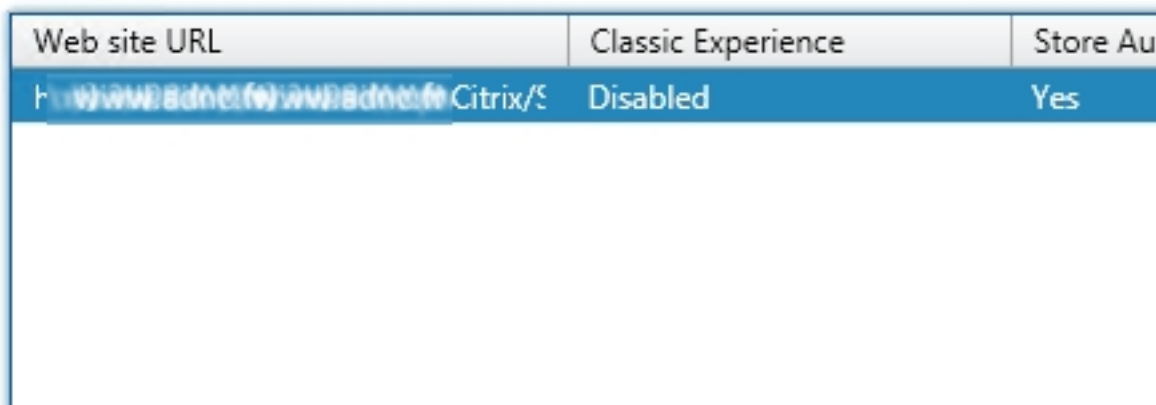

Web site URL	Classic Experience	Store Au
F:\www88dne1fe\www88dne1fe\Citrix/S	Disabled	Yes

Add... Configure... Remove

Dans l'interface cliquer « **Deploy Citrix Receiver** » et choisir l'option qui vous convient le

StoreFront

- Receiver Experience
- Customize Appearance
- Featured App Groups
- Authentication Methods
- Website Shortcuts
- Deploy Citrix Receiver**
- Session Settings
- Workspace Control

Deploy Citrix Receiver

For the best user experience, Receiver for Web sites detect and offer users the opportunity to download and install Citrix Receiver, enable Receiver for HTML5.

Deployment option: **Always use Receiver for HTML5**

Launch applications in the same

Quand on ne souhaite pas de configurer les politiques WebSockets :

✔ ▶ WebSockets connections Computer setting - ICA\WebSockets Allowed (Default: Prohibited)	Edit Unselect
✔ ▶ WebSockets port number Computer setting - ICA\WebSockets 8008 (Default: 8008)	Edit Unselect
✔ ▶ WebSockets trusted origin server list Computer setting - ICA\WebSockets * (Default: *)	Edit Unselect